


SANITARY PORTABLE CABIN MALE DIMENSIONS ML 5,90 X 2,30 X 2,50H (2,23 H INTERNAL)

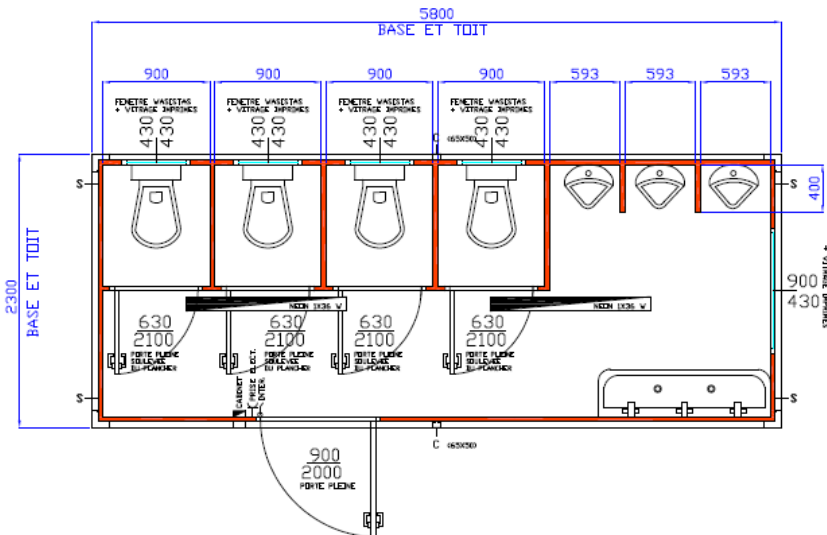

TECHNICAL DETAILS :

STRUCTURE: it is made up by base and roofing section bars, which are connected through angular uprights. It is an all **steel** unit with appropriate **thickness of 15/10**, zinc-plated sheets, electro welding, protected coated cycle on sight parts, white-grey color or other available RAL 3028 color.

WALLS: Sandwich modular panels, self-carrying walls, having zinc-plated prevarnished white-grey and fret-plated steel sheets (thickness 5/10) on both sides, insulated inside with expanded foam polyurethane (density 40 kg/cm). The panels are supported by strong profiles, of a proportionate thickness, serving as an upper and lower crowning frame, connected through male-female joints, which are properly and hermetically sealed, in order to be waterproof.

The external panels are 40 mm thickness

CEILING: horizontal ceiling, whose panels have got the same features of those used for the floor. Fret sheet upper wall: flat **thickness 30 mm., fret thickness 70 mm.** The roof is walking area, load capacity is about 120 kg./sq.m.

FLOOR: **PVC** floor fixed with a special glue to a chipboard panel (thickness 18 mm) fixed to the frame. The frame is made up of a zinc-plated tubular. The complete floor is properly lifted from the ground from two sleepers. The sleepers strengthen the whole body of the structure, permit a good ventilation to the rear part of the portable cabin and the setting of dumping pipes.

FIXTURES AND WINDOWS: aluminium, natural white electro varnished, or in PVC, **equipped with 4 MM glasses**, door locks, door handles and dust resistant gummy seals.

- 01 external door cm 90 x 200 (free space), 4mm glass upper part, lower blind part.
- 04 internal blind doors cm 63 x 200 (free space).
- 04 tilt opening windows cm 43 x 43 (free space), 4 mm printed glass.
- 01 tilt opening window cm 90 x 43 (free space), 4 mm printed glass.


ELECTRICAL SYSTEM: complete and well functioning electrical system, provided with visible cables trough the inside walls, according to the regulations in force.

- 02 NEON LAMPS 1x36W
- 01 socket
- 01 switch
- 01 ground wire switches - outside watertight box, suitable for the web connection device
- switch-board equipped with magneto thermal safety device.

HYDRAULIC SYSTEM: complete and well functioning, provided with visible cables trough the inside walls, according to the regulations in force.

- 04 Ceramic WC
- 03 Ceramic urinals
- 01 ABS washbasin with 3 taps

SANITARY PORTABLE CABIN FEMALE DIMENSIONS ML 5,90 X 2,30 X 2,50H (2,23 H INTERNAL)

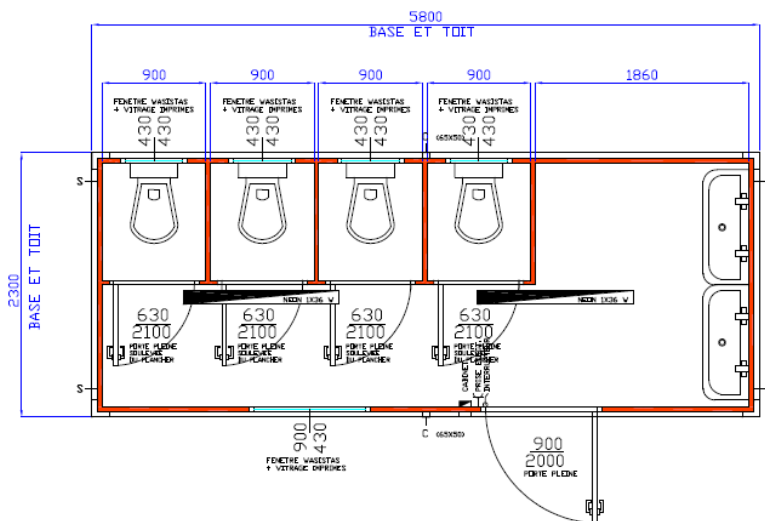

TECHNICAL DETAILS :

STRUCTURE: it is made up by base and roofing section bars, which are connected through angular uprights. It is an all **steel** unit with appropriate **thickness of 15/10**, zinc-plated sheets, electro welding, protected coated cycle on sight parts, white-grey color or other available RAL 3028 color.

WALLS: Sandwich modular panels, self-carrying walls, having zinc-plated prevarnished white-grey and fret-plated steel sheets (thickness 5/10) on both sides, insulated inside with expanded foam polyurethane (density 40 kg/cm³). The panels are supported by strong profiles, of a proportionate thickness, serving as an upper and lower crowning frame, connected through male-female joints, which are properly and hermetically sealed, in order to be waterproof.

The external panels are 40 mm thickness

CEILING: horizontal ceiling, whose panels have got the same features of those used for the floor. Fret sheet upper wall: flat **thickness 30 mm., fret thickness 70 mm.** The roof is walking area, load capacity is about 120 kg./sq.m.

FLOOR: PVC floor fixed with a special glue to a chipboard panel (thickness 18 mm) fixed to the frame. The frame is made up of a zinc-plated tubular. The complete floor is properly lifted from the ground from two sleepers. The sleepers strengthen the whole body of the structure, permit a good ventilation to the rear part of the portable cabin and the setting of dumping pipes.

FIXTURES AND WINDOWS: aluminium, natural white electro varnished, or in PVC, **equipped with 4 MM glasses**, door locks, door handles and dust resistant gummy seals.

- 01 external door cm 90 x 200 (free space), 4mm glass upper part, lower blind part.
- 04 internal blind doors cm 63 x 200 (free space).
- 04 tilt opening windows cm 43 x 43 (free space) 4 mm printed glass.
- 01 tilt opening window cm 90 x 43 (free space), 4 mm printed glass.

ELECTRICAL SYSTEM: complete and well functioning electrical system, provided with visible cables trough the inside walls, according to the regulations in force.

- 02 NEON LAMPS 1x36W
- 01 socket
- 01 switch
- 01 ground wire switches - outside watertight box, suitable for the web connection device
- switch-board equipped with magneto thermal safety device.

HYDRAULIC SYSTEM: complete and well functioning, provided with visible cables trough the inside walls, according to the regulations in force.

- 04 Ceramic WC
- 02 ABS washbasins with 2 taps