

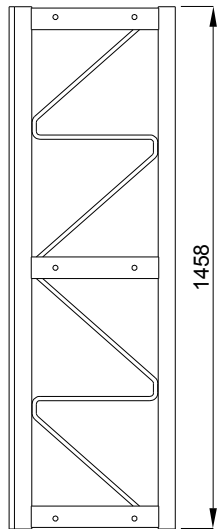
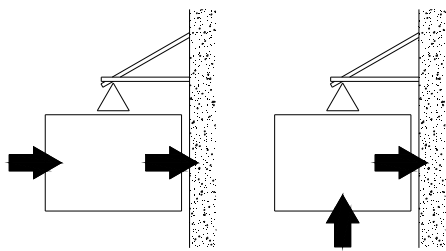


CAPACITÀ DI CARICO		PAYLOAD		ASCENSORE DA CANTIERE	
EHP12		o/or 1.500kg		CONSTRUCTION HOIST	
Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHP12	
Capacità con limitatore di carico	Capacity with overload system	Charge avec limiteur de charge	Capacidad con limitador de carga	14 o/or 1500 kg	
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	25/30 m/min	
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	160 m	
Dimensioni interne della cabina	Internal cage dimensions	Dimensions internes de la cabine	Dimensiones interno cabina	1,34 x 2,20 m	
Apertura porte	Doors opening	Ouverture des portes	apertura puertas	1,27 x 2,14 m	
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	2 x 4 kW	
Potenza servizio a intermittenza 15%	Rated power intermittence duty 15%	Puissance service intermittence 15%	Potencia servicio intermitencia 15%	2 x 6 kW	
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415V 50/60Hz 3Ph	
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	32 A	
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne consillée	Min. Potencia de linea	12 kW	
Peso unità base	Base unit weight	Poids unité de base	Peso unidad de base	1.650 Kg	
Ingrassatore automatico cremagliera	Rack automatic greasing pump	Graisser automatique de cremallere	Engrasador automatico de cremallera	✓	

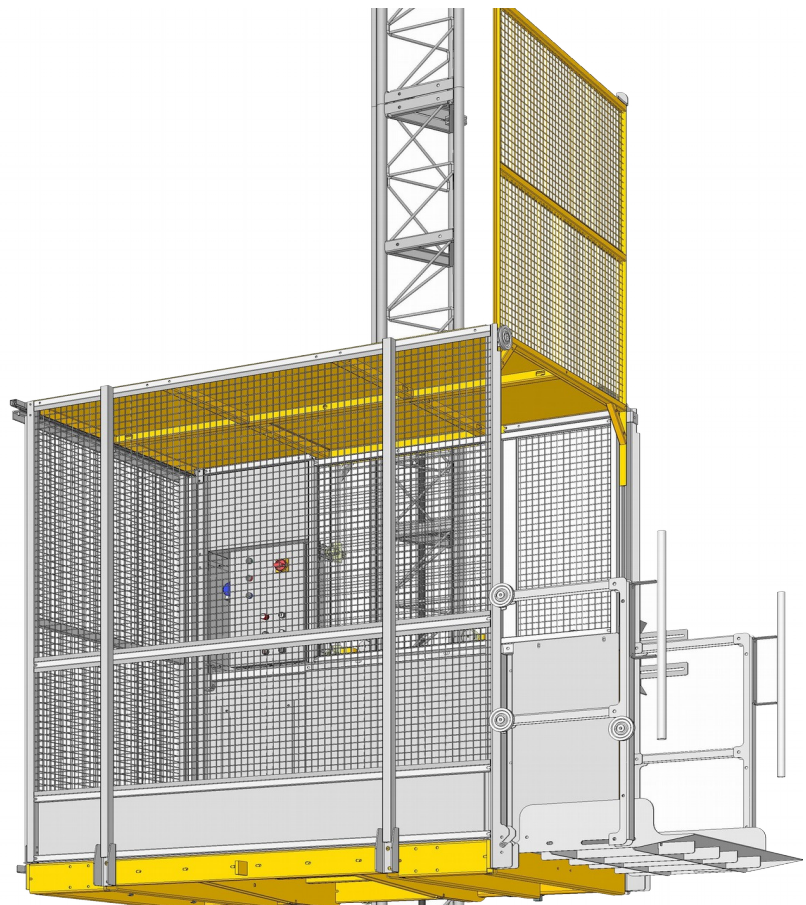


Compatibile con:  
*Interchangeability:*

EHM 1200  
 EHPM 1200  
 EHP 400  
 EHP 800



Configurazioni d'accesso possibili  
*Possible access configurations*

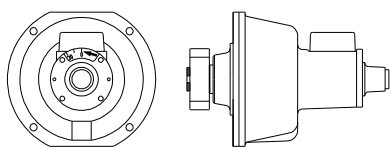

Freno d'emergenza  
 ad arresto progressivo  
*Overspeed safety device  
 with progressive stop*

